

09-13-00

A

PATENT

Attorney Docket No. SOHSH8.001AUS

Date: September 12, 2000

Page 1

ASSISTANT COMMISSIONER FOR PATENTS

WASHINGTON, D.C. 20231

ATTENTION: BOX PATENT APPLICATION

Sir:

Transmitted herewith for filing is the patent application of

Inventors: Masahiro Umeshita; Kazuo Miyajima

For: FUSE CONNECTION BOX AND METHOD FOR PRODUCING THE SAME


Enclosed are:

- (X) Five (5) sheets of drawing.
- (X) Priority under §119 is claimed to Japanese Patent Application No. JP-11-258343 filed September 13, 1999.
- (X) Return prepaid postcard.

CLAIMS AS FILED

FOR	NUMBER FILED	NUMBER EXTRA	RATE	FEE
Basic Fee			\$690	\$690
Total Claims	7 - 20 =	0	\$18	\$0
Independent Claims	2 - 3 =	0	\$78	\$0
If application contains any multiple dependent claims(s), then add			\$260	\$0
FILING FEE TO BE PAID AT A LATER DATE			\$690	

- (X) Please use Customer No. 20,995 for the correspondence address.

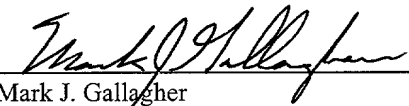
 Mark J. Gallagher
 Registration No. 43,622
 Attorney of Record

H:\DOCS\MJG\MJG-1421.DOC
 091200

09/12/00

09-13-00

A

INTELLECTUAL PROPERTY LAW

KNOBBE, MARTENS, OLSON & BEAR

A LIMITED LIABILITY PARTNERSHIP INCLUDING
PROFESSIONAL CORPORATIONS

PATENT, TRADEMARK AND COPYRIGHT CAUSES

620 NEWPORT CENTER DRIVE

SIXTEENTH FLOOR

NEWPORT BEACH, CALIFORNIA 92660-8016

(949) 760-0404

FAX (949) 760-9502

INTERNET WWW.KNOB.COM

JOSEPH S. CIANFRANI
JOSEPH M. REISMAN, PH.D.
WILLIAM R. ZIMMERMAN
GLEN L. NUTTALL
ERIC S. FURMAN, PH.D.
TIRZAH ABE LOWE
GEOFFREY Y. HIDA
ALEXANDER S. FRANCO
SANJIVPAL S. GILL
SUSAN M. MOSS
JAMES W. HILL, M.D.
ROSE M. THIESSEN, PH.D.
MICHAEL L. FULLER
MICHAEL A. GUILIANA
MARK J. KERTZ
RABINDER N. NARULA
BRUCE S. ITCHKAWITZ, PH.D.
PETER M. MIDGLEY
THOMAS S. MCCLENAHAN
MICHAEL S. OKAMOTO
JOHN M. GROVER
MALLARY K. DE MERLIER
IRFAN A. LATEEF
AMY C. CHRISTENSEN
SHARON S. NG
MARK J. GALLAGHER, PH.D.
DAVID G. JANKOWSKI, PH.D.
BRIAN C. HORNE
PAYSON J. LEMEILLEUR
WILLIAM G. BERRY
DIANA W. PRINCE

OF COUNSEL

JERRY R. SEILER
PAUL C. STEINHARDT

JAPANESE PATENT ATTY
KATSUHIRO ARAI**

EUROPEAN PATENT ATTY
MARTIN HELLEBRANDT

KOREAN PATENT ATTY
MINCHEOL KIM

SCIENTISTS & ENGINEERS
(NON-LAWYERS)

RAIMOND J. SALENIEKS**
DANIEL E. JOHNSON, PH.D.**
JEFFERY KOEPEKE, PH.D.**
KHURRAM RAHMAN, PH.D.
JENNIFER A. HAYNES, PH.D.
BRENDAN P. O'NEILL, PH.D.
THOMAS Y. NAGATA
LINDA H. LIU
YASHWANT VAISHNAV, PH.D.
MEGUMI TANAKA
CHE S. CHERESKIN, PH.D.**
ERIK W. ARCHBOLD
PHILIP C. HARTSTEIN
JULIE A. HOPPER
CHRIS S. CASTLE
JAMES W. AUSLEY
R. P. CARON, PH.D.
JENNIFER HAYES
KIRK E. PASTORIAN, PH.D.
CHARLES T. RIDGELY
KEITH R. MCCOLLUM
LANG J. MCHARDY

* A PROFESSIONAL CORPORATION
* ALSO BARRISTER AT LAW (U.K.)
** U.S. PATENT AGENT

KNOBBE*
MARTENS*
H. OLSON*
B. BEAR
OLSON*
BUNKER
NIEMAN
ARTHUR S. ROSE
JAMES F. LESNIAK
NED A. ISRAELSEN
DREW S. HAMILTON
JERRY T. SEWELL
JOHN B. SGANGA, JR.
EDWARD A. SCHLATTER
GERARD VON HOFFMANN
JOSEPH R. RE
CATHERINE J. HOLLAND
JOHN M. CARSON
KAREN VOGEL WEIL
ANDREW H. SIMPSON
JEFFREY L. VAN HOESEAR
DANIEL E. ALTMAN
MARGUERITE L. GUNN
STEPHEN C. JENSEN
VITO A. CANUSO III
WILLIAM H. SHREVE
LYNDA J. ZADRA-SYMES*
STEVEN J. NATAUPSKY
PAUL A. STEWART
JOSEPH F. JENNINGS
CRAIG S. SUMMERS
ANNEMARIE KAISER
BRENTON R. BABCOCK

THOMAS F. SMERAL, JR.
MICHAEL H. TRENHOLM
DIANE M. REED
JONATHAN A. BARNEY
RONALD J. SCHOENBAUM
JOHN R. KING
FREDERICK S. BERRETTA
NANCY WAYS VENSKO
JOHN P. GIEZENTANNER
ADEEL S. AKHTAR
GINGER R. DREGER
THOMAS R. ARNO
DAVID N. WEISS
DANIEL HART, PH.D.
DOUGLAS G. MUEHLHAUSER
LORI LEE YAMATO
MICHAEL K. FRIEDLAND
STEPHEN M. LOBBIN
STACEY R. HALPERN
DALE C. HUNT, PH.D.
LEE W. HENDERSON, PH.D.
DEBORAH S. SHEPHERD
RICHARD E. CAMPBELL
MARK M. ABUMERI
JON W. GURKA
ERIC W. NELSON
MARK R. BENEDICT, PH.D.
PAUL N. CONOVER
ROBERT J. ROBY
SABING H. LEE
KAROLINE A. DELANEY
JOHN W. HOLCOMB
JAMES J. MULLEN, III, PH.D.

Assistant Commissioner for Patents
Washington, D.C. 20231

CERTIFICATE OF MAILING BY "EXPRESS MAIL"

Attorney Docket No. : SOHSH8.001AUS
Applicant(s) : Masahiro Umeshita et al.
For : FUSE CONNECTION BOX AND METHOD
FOR PRODUCING THE SAME
Attorney : Mark J. Gallagher
"Express Mail"
Mailing Label No. : EL559447707US
Date of Deposit : September 12, 2000

I hereby certify that the accompanying

Transmittal; Specification in 13 pages; 5 sheets of drawings; Return Prepaid
Postcard

are being deposited with the United States Postal Service "Express Mail Post Office to
Addressee" service under 37 CFR 1.10 on the date indicated above and are addressed to the
Assistant Commissioner for Patents, Washington, D.C. 20231.


JUSTIN STOTTS

H:\DOCS\MJG\MJG-1422.DOC
091200

201 CALIFORNIA STREET
SUITE 1150
SAN FRANCISCO, CALIFORNIA 94111
(415) 954-4114
FAX (415) 954-4111

550 WEST C STREET
SUITE 1200
SAN DIEGO, CALIFORNIA 92101
(619) 235-8550
FAX (619) 235-0176

3801 UNIVERSITY AVENUE
SUITE 710
RIVERSIDE, CALIFORNIA 92501
(909) 781-9231
FAX (909) 781-4507

1900 AVENUE OF THE STARS
SUITE 1425
LOS ANGELES, CALIFORNIA 90067
(310) 551-3450
FAX (310) 551-3458

jc853 U.S. PRO
09/659999
09/12/00

FUSE CONNECTION BOX AND METHOD FOR PRODUCING THE SAME

BACKGROUND OF THE INVENTION

5 1. Background of the Invention

The present invention relates to a fuse connection box used for internal wiring of an automobile and a method for producing the same.

2. Description of the Related Art

10 Figure 1 and Fig. 2 show a fuse connection box of the related art. In Figs. 1 and 2, 10 represents a plastic housing, 12 a protective cover connected to the housing 10 through hinges 14, 16 a fuse (plate fuse), 16A an input terminal of a fuse 16, 16B an output terminal of a fuse 16 (there is no distinction between an input
15 terminal and output terminal in a fuse, but for convenience in explanation, 16A is made the input terminal and 16B the output terminal), 18 an input side wire, and 20 an output side wire.

20 As illustrated, the fuse connection box of the related art is formed with a one-piece housing 10. On the other hand, input side wires 18 and output side wires 20 are produced by different processes. The assembly into the housing is also performed as a different process.

25 Figure 1 shows the state of an input side

terminal (not shown) attached to an end of the input side wire 18 assembled in the housing.

Next, as illustrated in Fig. 2, an output side terminal (not shown) attached to an end of the output side wire 20 is assembled in the housing 10. By attaching the fuses 16 and covering the assembly with the protective cover 12 in this state, the fuse connection box is completed.

As explained above, since the input side wires 18 and the output side wires 20 are produced by separate processes and are assembled in the housing 10 by a separate process, the output side wires 20 to be later attached to the housing 10 (sometimes the input side wires 18 as well) have to have the output side terminals attached to their ends covered by protective bags 24 as shown in Fig. 3 to prevent short-circuits or other problems in the output side terminals attached to the ends in the period from production to assembly in the housing 10. Further, the bags 24 had to be removed when assembling the output side terminals 22 in the housing 10.

In this way, the fuse connection box of the related art required bags 24 for protecting the terminals of the ends of the wires to be attached to the housing later. It suffers from the disadvantage that time is

taken for the bags 24 to be attached and removed.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a
5 fuse connection box and a method of producing the same
which enable efficient assembly without requiring
protective bags.

To achieve this object, according to a first aspect
of the present invention, there is provided a fuse
10 connection box comprised of a fuse and a housing for
attaching the fuse, wherein said housing is divided into
a first side housing in which a first side terminal of an
end of a first side wire is assembled and a second side
housing in which a second side terminal of an end of a
15 second side wire is assembled, the first side housing and
second side housing have portions for engagement with
each other, and the first side housing and the second
side housing are engaged to form a single housing in
which the fuse can be attached.

20 By configuring the fuse connection box in this way,
the fuse connection box can be assembled by separately
assembling the first side terminal attached to the end of
the first side wire into the first side housing and
assembling the second side terminal attached to the end
25 of the second side wire into the second side housing,

then connecting the first side housing and second side housing. Therefore, the bags for protection of the terminals used in the past become unnecessary and assembly can be performed efficiently.

5 Preferably, the first side housing and the second side housing are of identical shapes having first engagement portions at one end in the direction of arrangement of fuses and having second engagement portions of shapes engaging with the first engagement
10 portions at the other end.

By doing this, since the first side housing and second side housing can be produced by the same mold, the cost becomes cheaper. Further, since there is no need to differentiate between the first side housing and second
15 side housing, part control becomes easy.

Preferably, there is further provided a protective cover attached to the first side housing and second side housing so as to cover the fuse in a state where the first side housing and the second side housing are
20 connected and the fuse is attached.

Preferably, the protective cover is formed with a protective frame for preventing action of an external force on an engagement portion between the protective cover and the first side housing and second side housing.

25 This is preferable to prevent the protective cover

from detaching.

According to a second aspect of the present invention, there is provided a method for producing a fuse connection box including a fuse and a housing for
5 attaching the fuse, comprising the steps of producing separately a first side housing in which a first side terminal of an end of a first side wire is assembled and having an engagement portion and a second side housing in which a second side terminal of an end of a second side
10 wire is assembled and having an engagement portion, engaging the engagement portions of the first side housing and second side housing to join them, and attaching a fuse to the joined housing.

15 BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects and features of the present invention will become clearer from the following description of the preferred embodiments given with reference to the accompanying drawings, in which:

20 Fig. 1 is a perspective view of a fuse connection box of the related art;

Fig. 2 is a perspective view of the state before attachment of fuses to a fuse connection box illustrated in Fig. 1;

25 Fig. 3 is a perspective view of an output side

terminal attached to an end of an output side wire in the state before assembling into the housing in the fuse connection box of the related art;

Fig. 4A and Fig. 4B show an embodiment of a fuse connection box of the present invention and a method of producing a fuse connection box, where Fig. 4A is a perspective view illustrating the state before connecting the input side housing and output side housing and Fig. 4B is a perspective view of the state after connecting the two housings;

Fig. 5 is a perspective view of the state before attaching the fuses in the housing illustrated in Fig. 4B and covering them with a protective cover; and

Fig. 6 is a sectional view of the state of connection of the protective cover and housing after covering by the protective cover from the illustrated state.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

A preferred embodiment of the present invention will be described in detail with reference to the drawings.

Figures 4A and 4B to Fig. 6 show an embodiment of the present invention. This fuse connection box, as shown in Fig. 4A, is comprised of an input side housing 26A serving as a first side housing of the present invention

in which input side terminals (not shown) of ends of
input side wires 18 serving as first side wires of the
present invention are assembled and an output side
housing 26B serving as a second side housing of the
5 present invention in which output side terminals 22 of
ends of output side wires 20 serving as second side wires
of the present invention. The method of assembling the
input side terminals in the input side housing 26A and
the method of assembling the output side terminals 22 in
10 the output side housing 26B are similar to those of a
housing of the related art.

The input side housing 26A and the output side
housing 26B are identical in shape and have guide pieces
28 and engagement projections 30 (first engagement
15 portions) formed at the outside surface at one end of the
direction of arrangement of the terminals and have
engagement frames 32 (second engagement portions) of
shapes engaging with the engagement projections 30 at the
other end. Further, the input side housing 26A and the
20 output side housing 26B are further formed with
engagement projections 34 for attaching the later
described protective cover to the top of the two ends of
the direction of arrangement of terminals.

When the input side housing 26A and the output side
25 housing 26B configured in this way are made to face each

other as illustrated in Fig. 4A and are pushed together so that the guide pieces 28 are inserted inside the engagement frame part 32, the engagement frame parts 32 engage with the engagement projections 30 as illustrated in Fig. 4B. As a result, the input side housing 26A and the output side housing 26B are connected with each other and a single housing 26 able to have fuses attached to it is formed.

Next, the fuses 16 are attached to the housing 26 as illustrated in Fig. 5 and the protective cover 36 is attached. The method of attaching the fuses 16 is the same as with the fuse connection box of the related art. The protective cover 36 is formed with engagement pieces 38 for engagement with the engagement projections 34 of the housing 26 (see Fig. 6). By engaging the engagement pieces 38 with the engagement projections 34, the protective cover 36 is attached to the housing 26. Further, the protective cover 36 is formed with a protective frame 40 so as to surround the engagement portions of the engagement pieces 38 and engagement projections 34. This protective frame 40 is designed to prevent external force from being applied to the engagement portions of the engagement pieces 38 and the engagement projections 34 and to thereby keep the protective cover 36 from detaching from the housing 26.

As described above, according to the present invention, since the housing is divided into an input side housing serving as the first side housing and an output side housing serving as the second side housing, 5 the assembly of the input side terminals attached to the ends of the input side wires serving as the first side wires into the input side housing and the assembly of the output side terminals attached to the ends of the output side wires serving as the second side wires in the output 10 side housing can be performed by separate processes. Next, by connecting the input side housing and the output side housing, the fuse connection box can be assembled. As a result, it is possible to omit the bags for terminal protection which had been used in the related art and to 15 efficiently assemble the fuse connection box.

While the invention has been described with reference to specific embodiment chosen for purpose of illustration, it should be apparent that numerous modifications could be made thereto by those skilled in 20 the art without departing from the basic concept and scope of the invention.

CLAIMS

1. A fuse connection box comprising a fuse and a housing for attaching the fuse,

said housing being divided into a first side
5 housing in which a first side terminal of an end of a
first side wire is assembled, and a second side housing
in which a second side terminal of an end of a second
side wire is assembled,

said first side housing and second side housing
10 having portions for engagement with each other, and

said first side housing and second side housing
being engaged to form a single housing in which said fuse
can be attached.

2. A fuse connection box as set forth in claim 1,
15 wherein said first side housing and said second side
housing are of identical shapes having first engagement
portions at one end in the direction of arrangement of
fuses and having second engagement portions of shapes
engaging with the first engagement portions at the other
20 end.

3. A fuse connection box as set forth in claim 1,
further comprising a protective cover attached to said
first side housing and second side housing so as to cover
said fuse in a state where said first side housing and
25 said second side housing are connected and said fuse is

attached.

4. A fuse connection box as set forth in claim 3,
wherein said protective cover is formed with a protective
frame for preventing action of an external force on an
5 engagement portion between said protective cover and said
first side housing and second side housing.

5. A fuse connection box as set forth in claim 2,
further comprising a protective cover attached to said
first side housing and second side housing so as to cover
10 said fuse in a state where said first side housing and
said second side housing are connected and said fuse is
attached.

6. A fuse connection box as set forth in claim 5,
wherein said protective cover is formed with a protective
15 frame for preventing action of an external force on an
engagement portion between said protective cover and said
first side housing and second side housing.

7. A method for producing a fuse connection box
provided with a fuse and a housing for attaching the
20 fuse, comprising the steps of:

producing separately a first side housing in
which a first side terminal of an end of a first side
wire is assembled and having an engagement portion and a
second side housing in which a second side terminal of an
25 end of a second side wire is assembled and having an

engagement portion,

engaging the engagement portions of said first
side housing and second side housing to join them, and
attaching a fuse to the joined housing.

002760 0005960

FUSE CONNECTION BOX AND METHOD FOR PRODUCING THE SAME

ABSTRACT OF THE DISCLOSURE

5

100559000-001200
A fuse connection box enabling efficient assembly without requiring a bag for protection of the terminal to be assembled in the housing, wherein the housing for attachment of fuses is divided into an input side housing in which an input side terminal of the end of the input side wire is assembled and an output side housing in which an output side terminal of the end of the output side wire is assembled, the input side housing and the output side housing have engagement portions with each other, and these are engaged to form a single housing able to have fuses attached to it. The fuse connection box can be assembled by separately assembling the input side terminal attached to the end of the input side wire into the input side housing and assembling the output side terminal attached to the end of the output side wire into the output side housing, then connecting the input side housing and output side housing. Therefore, the bag for protection of the terminal becomes unnecessary and assembly can be performed efficiently.

15
20

FIG. 1
PRIOR ART

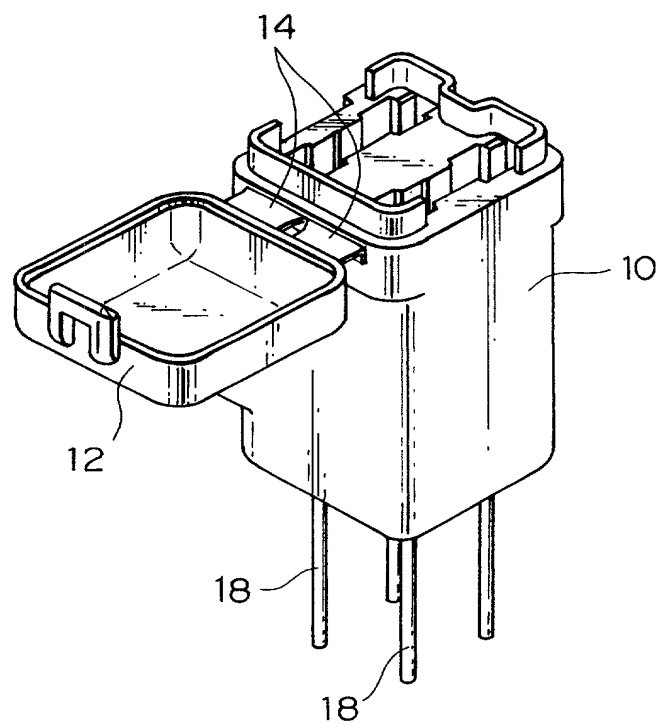


FIG. 2
PRIOR ART

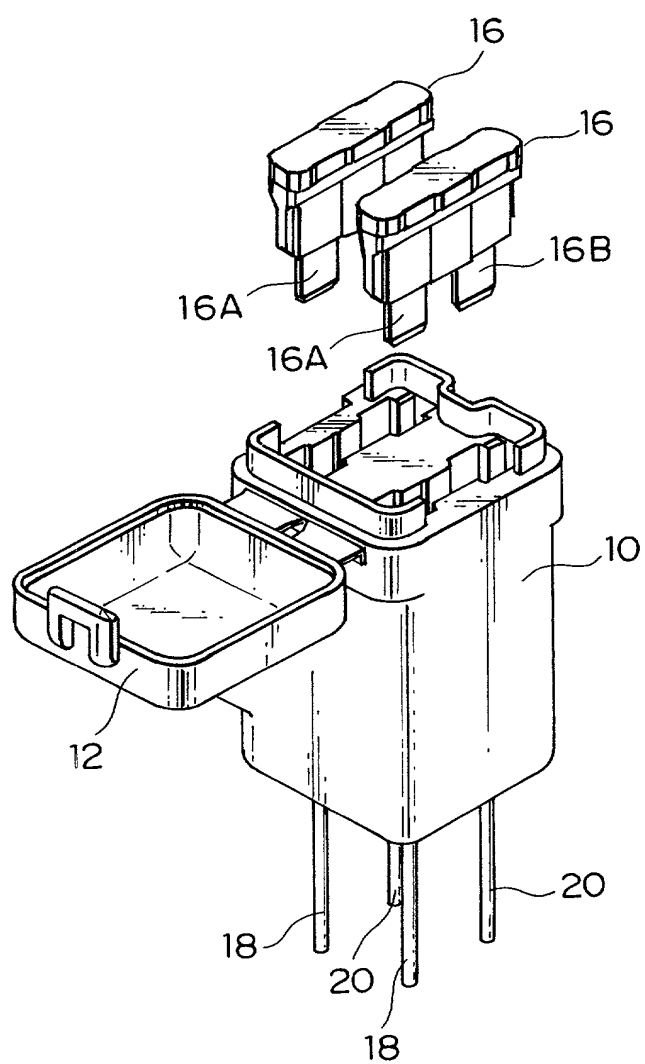


FIG. 3
PRIOR ART

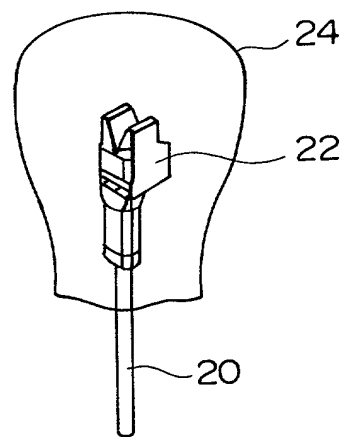


FIG. 4A

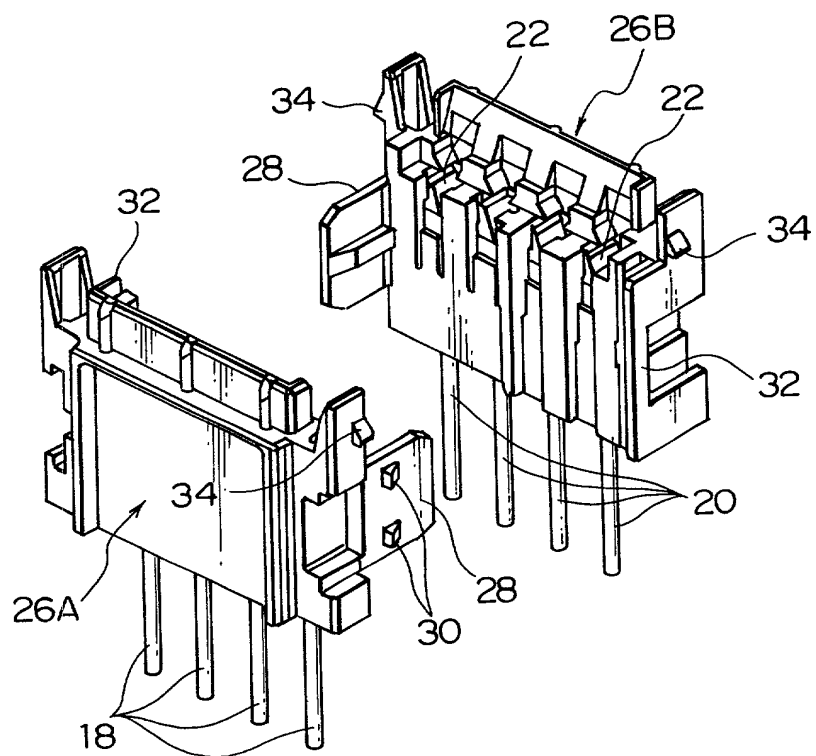


FIG. 4B

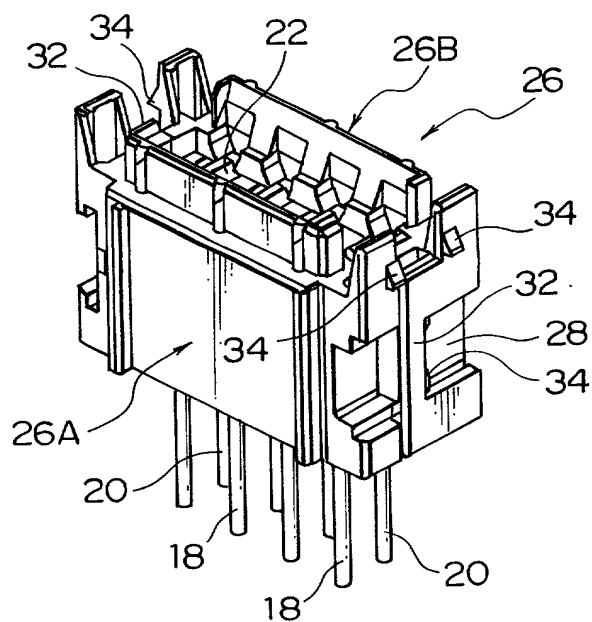


FIG. 5

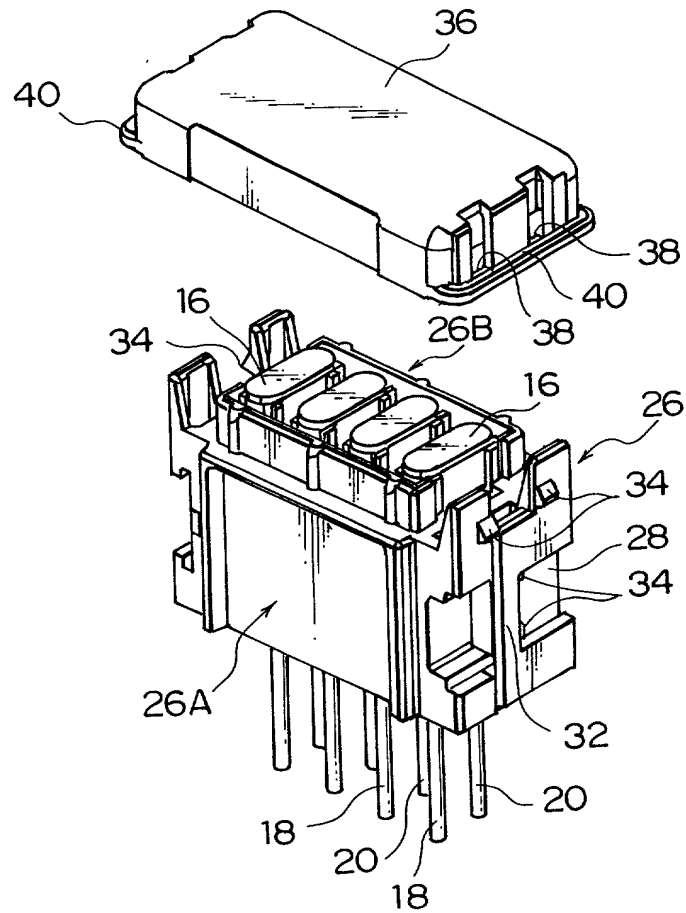


FIG. 6

